

Floor Stand Rack


General Discription

- Arc shaped vented front door with hexagonal holes, can turn over 180 turning degree.
- Vented frond and rear door with excellent ventilation rate above 70%.
- Vented rear door with hexagonal holes
- Perforated front door design or acrylic front door design.
- Removable side panels with latch, easy to install, optional lock.
- Adjustable cable entry on the top and bottom
- Welded steel frame for front and back part, flat packing is available, easy to transfer
- Optional plinth to fix cabinet on floor; under base cable entry
- S-Shaped mounting profile, free to move forward and back;
- Unassembled packing, about 2/5 of original volume, save container space
- Various optional accessories for common using;




Specification

S/N	SMART-CSM
Standard	Comply with ANS/EIA RS-310-D, IEC297-2, DIN41491, PART1, DIN41491, PART7, ETSI Standard;
Material	SPCC quality cold rolled steel; Mounting profile: thickness: 2.0mm; Others: 1.2mm;
Loading Capacity	Static loading: 800kg (on the adjustable feet)
Degree of Protection	IP20
Surface finish	Degreasing, Pickling, Phosphating, Powder Coated
Product specification	18U-42U Width : 600mm, 800mm Dept : 600mm, 800mm, 900mm, 1000mm, 1200mm

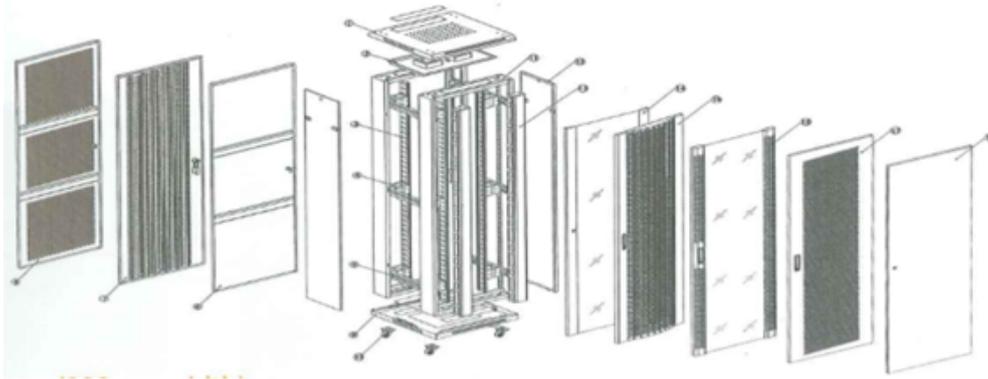

Main structure (800mm Width):

- | | | | |
|--------------------------|----------------------------------|---------------------------------|--------------------------------|
| 1 Top cover | 2 Fan unit | 3 Mounting profile | 4 Spacer |
| 5 Mounting angle | 6 Rear door with hexagonal holes | 7 High-density vented rear door | 8 Steel rear door without hole |
| 9 Bottom panel | 10 Heavy duty castor | 11 Frame | 12 Side panel |
| 13 Cable management slot | 14 Front door | 15 Front door | 16 Front door |
| 17 Front door | 18 Front door | | |

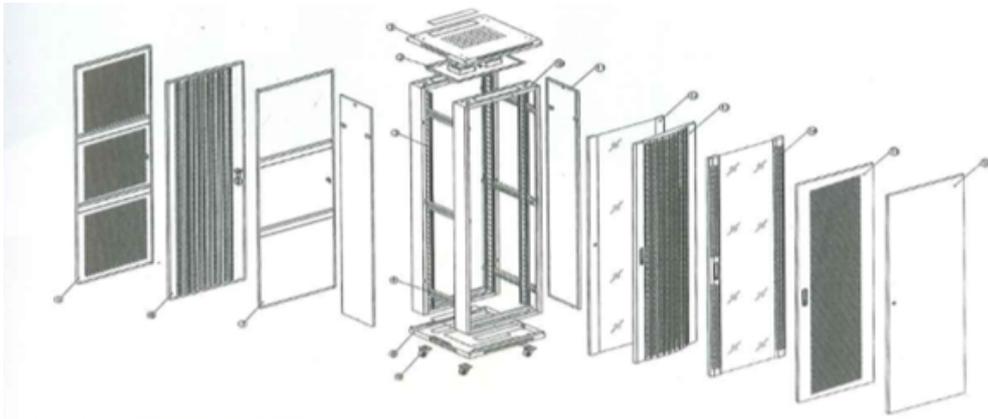

Main structure (600mm Width):

- | | | | |
|-----------------------------|---------------------------------|--------------------------------|------------------|
| 1 Top cover | 2 Fan unit | 3 Mounting profile | 4 Mounting angle |
| 5 Door with hexagonal holes | 6 High-density vented rear door | 7 Steel rear door without hole | 8 Bottom panel |
| 9 Heavy duty castor | 10 Frame | 11 Side panel | 12 Front door |
| 13 Front door | 14 Front door | 15 Front door | 16 Front door |



Fan module



"U"marked mounting profile



Advanced spring locker



Removable side door



Lockable cable entry



Earthing kit